

DOUBLE FLANGED


F8.1

Y PIPE

CLASS K12

STANDARD

BS EN 545/598 ISO 2531

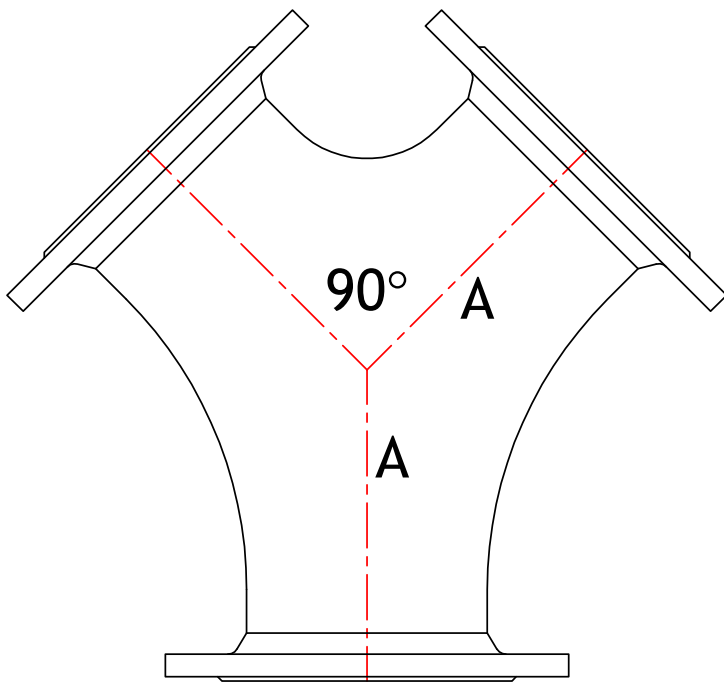

| Diameter (mm) | Length 'A' (mm) | Weight (Kg) | CSG Reference |
|------------------|--------------------|----------------|------------------|
| 80 | 165 | 16 | F080Y |
| 100 | 180 | 20 | F100Y |
| 150 | 220 | 32 | F150Y |
| 200 | 260 | 49 | F200Y |
| 250 | 350 | 80 | F250Y |
| 300 | 400 | 114 | F300Y |
| 350 | 450 | 165 | F350Y |
| 400 | 500 | 219 | F400Y |
| 450 | 550 | 280 | F450Y |
| 500 | 600 | 364 | F500Y |
| 600 | 700 | 563 | F600Y |

OPTIONS

- EN598
- EN545

Please remember to order gaskets

Technical drawings for illustrative purposes only. Actual product may be subject to minor design changes without notice.



Head Office
 Langley Road South,
 Salford,
 Manchester M6 6TZ
T: +44 (0) 161 745 9095
F: +44 (0) 161 745 8996